

# Hippo Jetting Unit 10 000 L





Wernerpumps.com








Fire Hydrant Filling Valve with Inline Strainer





Hose Guide for 1" Hose



Manhole for Inspection and Cleaning





Heavy Duty Hosereel

Failsafe Control Panel

F30 Filter for Water Filtration

Sight glass for water level indication







### **TECHNICAL SPECIFICATIONS AND EQUIPMENT**

Double Axle Truck (see Fig. 1 and 2)	
Tank volume (L)	10000 (approx)
Payload (Kg)	10000 (approx)
Dimensions LxBxH (mm)	9865 x 2577 x 3024

#### **High Pressure System**

- WERNER high pressure piston plunger pump with a capacity of 295 L/min and maximum pressure of 135 bar (see Fig. 3)
- Fitted with a HP pump oil cooler
- Pressure adjustable from zero to max
- Extra hand valve for manual by-pass

#### Tank Super structure

- Tank sheet in 3CR12 stainless steel
- Manhole and baffles (see Fig. 4)
- 2" inline filter with 360-micron, 50 mesh insert
- 2 x 10bar gauges for checking filter cleanliness
- Heavy duty 180m hydraulic hose reel
- 120m <sup>1</sup>/<sub>2</sub>" light weight plastic hose
- Sight glasses at the rear for water level indication (see Fig. 5)

#### **Control System**

- Rev counter for RPM
- 250 Bar pressure gauge
- Emergency stop button
- Speed control cable for engine speed

#### Accessories

- Heavy duty 80m 1/2" hand operated hose reel with brake
- $\bullet$  25m  $^{1\!\!/_2\!"}$  Rubber hose
- 250 Bar high-pressure gun
- Nozzles: Bullet type, Grenade bomb, Pointed



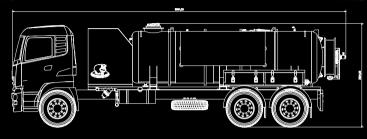


Fig. 1







**HIPPO JETTING 10** 




Fig. 2









## Get in touch





## Sebastian Werner

4-6 Edison Road, New Era, Springs Republic of South Africa P.O. Box 11052 Selcourt, Springs, 1567 
 Cell:
 +27 (0) 82 455 5522

 Tel:
 +27 (0) 11 362 6280

 Fax:
 +27 (0) 11 362 6797

 E-mail:
 sebastian@wernerpumps.com

 Website:
 www.wernerpumps.com

Managing Director

B-BBEE LEVEL CONTRIBUTOR

5<sup>E</sup>

llerhum

**Established** 

CERTIFICA

bmtrada

SO 9001 CERTIFICA